

BUSE SJ 0°


Caractéristiques

- Gros orifice qui limite le risque de dérive
- Pulvérisation haute vitesse en bande



Domaine d'application

- Pulvérisation d'engrais en bandes



1 filet



1-2.5 bar




Type H



INOX

SJ 0°	Vrac
	L'unité
Matière Inox	
SJ 0-0.004	716879
SJ 0-0.008	716886
SJ 0-0.015	716880
SJ 0-0.02	716881
SJ 0-0.03	716885

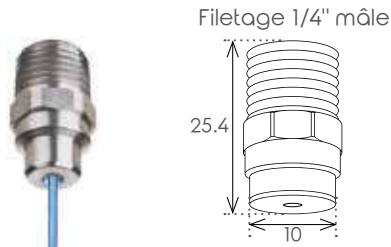

Cod.	bar	l/min	l/ha (écartement latéral : 75 cm)									
			4 km/h	6 km/h	8 km/h	10 km/h	15 km/h	20 km/h	25 km/h	30 km/h	35 km/h	
SJ 0-0.004	1.0	0.91	182	121	91	73	48	36	29	24	21	
	1.5	1.12	224	149	112	90	60	45	36	30	26	
	2.0	1.29	258	172	129	103	69	52	42	34	30	
	2.5	1.44	288	192	144	115	77	58	46	38	33	
SJ 0-0.008	1.0	1.82	364	243	182	146	97	72	58	48	42	
	1.5	2.23	446	297	223	178	119	89	71	59	51	
	2.0	2.58	516	344	258	206	138	103	83	69	59	
	2.5	2.88	576	384	288	230	154	115	92	77	66	
SJ 0-0.015	1.0	3.42	684	56	342	274	182	137	109	91	72	
	1.5	4.18	836	557	418	334	223	167	134	111	95	
	2.0	4.83	966	644	483	386	258	193	155	129	110	
	2.5	5.40	1080	720	540	432	288	216	173	144	123	
SJ 0-0.02	1.0	4.56	912	608	456	365	243	182	146	122	104	
	1.5	5.58	1116	744	558	446	298	223	179	149	128	
	2.0	6.45	1290	860	645	516	344	258	206	172	147	
	2.5	7.21	1442	961	721	577	385	288	231	192	165	
SJ 0-0.03	1.0	6.84	1366	911	683	546	364	273	219	182	156	
	1.5	8.37	1674	1116	837	670	446	335	268	223	191	
	2.0	9.66	1932	1288	966	773	515	386	309	258	221	
	2.5	10.8	2160	1440	1080	864	576	432	346	288	247	

BUSE VR

Caractéristiques

- Pulvérisation flexible avec des vitesses de pulvérisation changeante
- Application d'engrais liquide en douceur grâce à un impact de pulvérisation extrêmement faible



Domaine d'application

- Pulvérisation d'engrais latérale extrêmement uniforme



130°



2-8 bar



POM

VR	Vrac
	L'unité
Matière Polyacétal (POM)	
VR-L	717767
VR-M	717769



717767



717769

Cod.	bar	l/min	l/ha (écartement latéral : 50 cm)									
			5 km/h	6 km/h	7 km/h	8 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	
VR-L	2.0	1.83	439	366	314	275	220	183	157	137	122	
	3.0	2.71	650	542	465	407	325	271	232	203	181	
	4.0	3.64	874	729	625	546	437	364	312	273	243	
	5.0	4.52	1.086	905	775	678	543	452	388	339	302	
	6.0	5.43	1.303	1.086	931	814	652	543	465	407	362	
	7.0	6.40	1.535	1.280	1.097	960	768	640	548	480	427	
	8.0	7.29	1.749	1.457	1.249	1.093	874	729	625	546	486	
	2.0	1.03	247	206	177	154	124	103	88	77	69	
VR-M	3.0	1.37	329	275	235	206	165	137	118	103	92	
	4.0	1.71	410	341	293	256	205	171	146	128	114	
	5.0	2.07	496	414	355	310	248	207	177	155	138	
	6.0	2.50	600	500	428	375	300	250	214	187	167	
	7.0	2.92	701	584	501	438	351	292	250	219	195	
	8.0	3.57	857	715	612	536	429	357	306	268	238	